

FIBERROAD

# LAYER 2+ MANAGED INDUSTRIAL PoE SWITCH

Product Data Sheet





## L2+ Managed Industrial PoE Switch

L2+ Managed Industrial PoE Switch is a multi-port, high-standard Industrial Managed Ethernet Switch independently developed by Fiberroad for industrial ethernet network. This product adopts industry-leading technical standards and can provide stable and reliable Ethernet transmission with high-quality design and reliability. They are designed in a rack mount aluminum housing and have 24 Ethernet ports in total (depending on model). Plus an additional 4 Gigabit SFP providing for data uplink and backbone connectivity. As a result, it can supply power to PD terminal equipment like wireless AP, webcam, VoIP, and visual intelligent building intercom through network cable and meet the infrastructure requirements of a high-density PoE/PoE+/PoE++ supply.

### Main Features

- IEEE 802.3af/at/bt PoE++ Standard, without damaging not-PoE devices.
- Advanced PoE management functions : PoE output setting, Smart PoE, PoE scheduling and PoE Budget Management.
- Priority system for PoE Port, it will supply power to the high priority level port first when the power budget is insufficient.
- Full gigabit L2+ management, easy to manage the PoE network by CLI/WebGUI/NMS.
- Build up a redundant PoE network with STP/RSTP/ERPSv2.
- RADIUS, IEEE 802.1X, SNMPv3, HTTPs and SSH to enhance network security.
- Bandwidth management prevents unpredictable network status with "Lock Port" to restrict access to authorized MAC addresses.
- QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR&SP+WRR
- All-aluminum Case, Compact and Fanless Design



The Industrial Ethernet Switch adopts mature technology and open network standards, enabling it to operate with low temperature and high temperature, anti-electromagnetic interference, antisalt fog, antivibration and anti-shake. Industrial switches are designed for harsh environments such as industrial networking and intelligent transportation systems (ITS) with standard IP40 protection. Additionally, they can be used in military and utility markets where environmental conditions exceed commercial product specifications.

# Product Specifications

| <b>Ethernet Interface</b> |   |  |  |
|---------------------------|---|--|--|
| Model                     | FR-9M34F8   | FR-9M348F  | FR-9M3424  |
| Ports                     | 8×10/100/1000Base-TX<br>16×1000Base-X SFP<br>4xGigabit Combo(SFP/RJ45)  | 16×10/100/1000Base-TX<br>8×1000Base-X SFP<br>4xGigabit Combo(SFP/RJ45) | 24×10/100/1000M Base-TX<br>4xGigabit Combo(SFP/RJ45) |
| Port Mode(Tx)             | Auto Negotiation<br>Full/Half Duplex Mode<br>Auto MDI/MDI-X Connection  |  |  |
| Standards                 | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |  |  |
| Packet Buffer Size        | 4Mbits  |  |  |
| Maximum Packet Length     | Up to 10K   |  |  |
| MAC Address Table         | 8K  |  |  |
| Transmission Mode         | Store and Forward (full/half duplex mode)   |  |  |
| Exchange Property         | Delay time: < 7µs<br>Backplane bandwidth: 56Gbps  |  |  |
| IGMP Group                | 4096  |  |  |
| Max. No. of VLAN          | 256   |  |  |
| VLAN ID Range             | VID 1 to 4094   |  |  |

## Physical Characteristics

|              |                  |
|--------------|------------------|
| Housing      | Aluminum case    |
| IP Rating    | IP40             |
| Dimensions   | 400mmx300mmx45mm |
| Installation | Rack Mount       |
| Weight       | 2600g            |

## Environmental

|                       |  |
|-----------------------|--|
| Operating Temperature | -40°C~75°C (-40 to 167 °F)   |
| Operating Humidity    | 5%~90% (non-condensing)  |
| Storage Temperature   | -40°C~85°C (-40 to 185 °F)   |
| MTBF                  | > 250,000@Telcordia(Bellcore)GB                                      |
| Heat Dissipation      | 75 BTU/h (Non-PoE)<br>1086 BTU/h (300W PoE)<br>2518 BTU/h (720W PoE) |
| Cooling               | Passive Cooling, Fanless Design                                      |
| Noise Level           | 0 dBA  |

# Product Specifications

## PoE & Power Supply

|                           |  |            |            |   |             |             |
|---------------------------|--|------------|------------|---|-------------|-------------|
| Model                     | FR-9M3424P   | FR-9M348FP | FR-9M34F8P | FR-7M3424BT                             | FR-9M348FBT | FR-9M34F8BT |
| PoE Ports                 | Port 1-24  | Port 9-24  | Port 17-24 | Port 1-24                               | Port 9-24   | Port 17-24  |
| Power Supply Pin          | Default: 1/2(+), 3/6(-)  |            |            | Default: 1/2(+), 3/6(-), 4/5(+), 7/8(-) |             |             |
| Max Power Per Port        | IEEE802.3 af/at 30W  |            |            | IEEE802.3 af/at/bt 90W                  |             |             |
| Total PWR / Input Voltage | 480W(DC48-56V) (Model dependent)   |            |            | 720W(DC48-56V) (Model dependent)        |             |             |
| Power Consumption         | 24 Watts Max(without PoE load)   |            |            |   |             |             |
| Power Inputs              | 2  |            |            |   |             |             |
| Input Voltage             | 9-56VDC, Redundant dual inputs   |            |            |   |             |             |
| Operating Voltage         | Non-PoE Mode: 9-56VDC<br>30W PoE Mode: 48-56VDC<br>90W PoE Mode: 52-56VDC(IEEE802.3bt model)               |            |            |   |             |             |
| Connector                 | 1 removable 6-contact terminal blocks<br>Pin 1/2 for Power 1, Pin 3/4 for Power 2, Pin 5/6 for fault alarm |            |            |   |             |             |
| Protection                | Overload Current Protection, Reverse Polarity Protection   |            |            |   |             |             |

## Ethernet Software Features

|                           |  |
|---------------------------|--|
| Redundancy Protocols      | Support STP/RSTP/MSTP/ERPSv2, Link Aggregation   |
| Multicast Support         | Support IGMP Snooping V1/V2/V3, support GMRP, GVMP, 802.1Q   |
| VLAN                      | Support IEEE 802.1Q 4K VLAN, Support QinQ, Double VLAN,  |
| Time Management           | SNTP   |
| QoS                       | Flow-based redirection<br>Flow-based rate limiting<br>Flow-based packet filtering<br>8*Output queues of each port 802.1p/DSCP priority mapping<br>Diff-Serv QoS, Priority Mark/Remark<br>Queue Scheduling Algorithm (SP, WRR, SP+WRR)  |
| ACL                       | Port-based Issuing ACL<br>ACL based on port and VLAN<br>L2 to L4 packet filtering, matching first 80 bytes message.<br>Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc   |
| POE Management            | Total power limit of PoE power supply<br>PoE output power allocation<br>PoE output priority configuration<br>PoE working status<br>Scheduling of PoE operation   |
| Diagnostic Maintenance    | Support port mirroring, Syslog, Ping   |
| Management Function       | Support CLI, WEB, SNMPv1/v2/v3, Telnet server for management, IEEE, LLDP, DHCP Server/Client(IPv4/IPv6), Cloud/MQTT  |
| Alarm Management          | Support 1 way relay alarm output, RMON, TRAP   |
| Security                  | Broadcast Storm Protection, HTTPS/SSLv3, AAA & RADIUS, SSH2.0<br>Support DHCP Snooping, Option 82, 802.1X security access,<br>Support user hierarchical management, ACL access control list,<br>Support DDOS, port-based MAC filtering / binding, MAC black holes, IP source protection, Port isolation, ARP message speed limit |
| Advance Layer 2+ Features | IPv4/IPv6 Management<br>Static Route   |

# Product Specifications

| LED                       | State    | Description                                 |
|---------------------------|----------|---|
| <b>PWR (P1&amp;P2)</b>    | ON       | Power is being supplied                     |
|                           | OFF      | Power is not being Supplied.                |
| <b>RUN</b>                | Blinking | The system is running well                  |
|                           | OFF      | The system is running unwell                |
| <b>FAIL(Only For PoE)</b> | ON       | PoE Status is abnormal                      |
|                           | OFF      | PoE Status is normal                        |
| <b>MAX(Only For PoE)</b>  | ON       | Total PoE Power out of maximum power budget |
|                           | OFF      | Total PoE Power under maximum power budget  |
| <b>R.O.</b>               | ON       | Ring Owner                                  |
|                           | OFF      | Not Ring Owner                              |
| <b>RING</b>               | ON       | Ring is enabled                             |
|                           | OFF      | Ring is disabled                            |
| <b>Link/ACT (1-28)</b>    | ON       | Port connection is active                   |
|                           | Blinking | Data transmitted                            |
|                           | OFF      | Port connection is not active.              |
| <b>RJ45 Port Speed</b>    | ON       | 1000M is running                            |
|                           | OFF      | No 1000M is running                         |
| <b>ALM</b>                | ON       | Has alarm information                       |
|                           | OFF      | No alarm information                        |

## Regulatory & Warranty


|               |   |
|---------------|---|
| Safety        | IEC/EN 62368-1  |
| EMI           | EN55032 Class A, CISPR 32 FCC Part 15B Class A  |
| EMS           | EN61000-4-2 (ESD) EN61000-4-3 (RS) EN61000-4-4 (EFT) EN61000-4-5 (Surge)<br>EN61000-4-6 (CS) EN61000-4-8 (PFMF) |
| Shock         | IEC 60068-2-27  |
| Free Fall     | IEC 60068-2-32  |
| Vibration     | IEC 60068-2-6   |
| Environmental | RoHS  |
| Warranty      | 5 Years, Details See: <a href="http://www.fiberroad.com">www.fiberroad.com</a>                                  |

## Package Contents

|                  |  |
|------------------|--|
| Device           | 1x Industrial Ethernet Switch              |
| Cable            | 1xDB9 female to RJ45 10-pin                |
| Installation Kit | 2x Rack-Mount Kits                         |
| Documentation    | 1 x Quick Start guide<br>1 x Warranty card |

# Product Specifications

## Dimensions Unit: mm

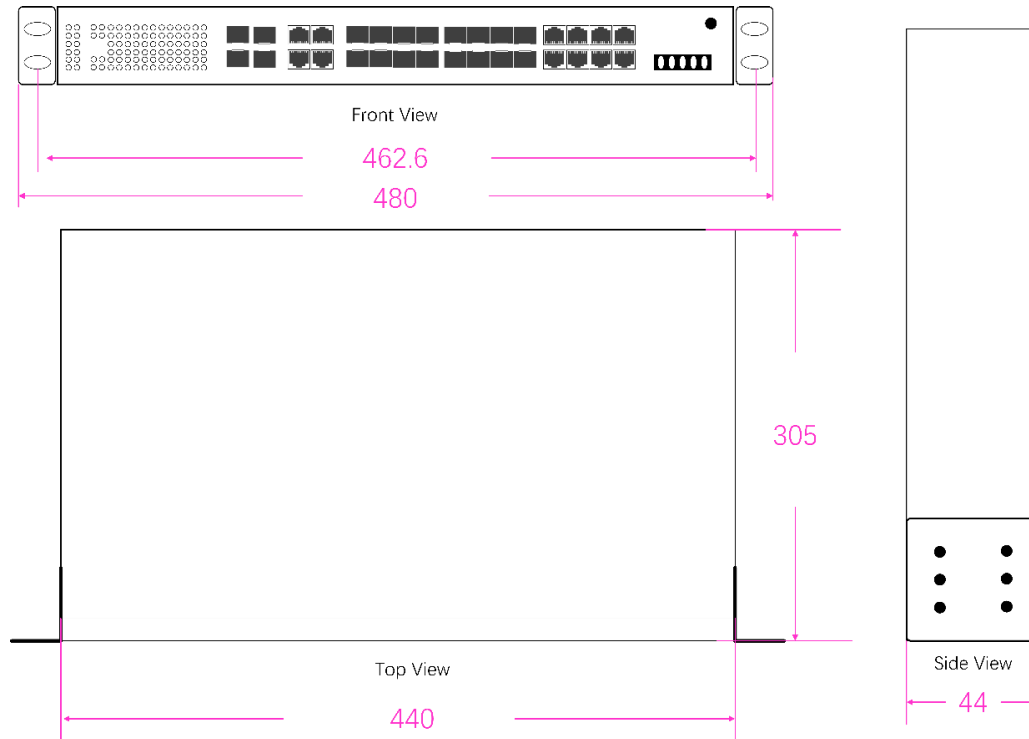

## Accessories(Sold Separately)

| Power Supply                          |  |
|---------------------------------------|--|
| FR-I-60-24                            | DIN-rail 24 VDC power supply with 60W/0.6A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature        |
| FR-I-120-48                           | DIN-rail 48-58V VDC power supply with 120W/1.2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |
| FR-I-240W-48                          | DIN-rail 48-55V VDC power supply with 240W/2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| FR-I-480W-48                          | DIN-rail 48-55V VDC power supply with 480W/4A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| SFP Optical Transceiver               |  |
| FRSX-1L311C-I                         | 1.25Gb/s 1310nm 10km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)                                     |
| FRSX-1L341C-I                         | 1.25Gb/s 1310nm 40km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)                                     |
| FRSX-1L5X1C-I                         | 1.25Gb/s 1550nm 80/100km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)                                 |
| FRSX-1L3523/5323C-I                   | 1.25Gb/s 1310nm/1550nm 20km BiDi SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)                         |
| Armored Fiber Patch Cable / LAN Cable |  |
| FRPC-A-LC                             | Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Outdoor Application , 1-50m                                   |
| FRLC-A-CAT6                           | Armored Cat6 Snagless shielded(SFTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m – 3m                              |

## Precautions

To avoid damage to the equipment and personal injury caused by improper use, please observe the following precautions:

- ❖ Keep the power off during installation, wear an anti-static wrist, and ensure that the anti-static wrist is in good contact with the skin to avoid potential safety hazards.
- ❖ The switch can work normally under the correct power supply. Please confirm that the power supply voltage matches the voltage indicated by the switch.
- ❖ Before powering on the switch, please make sure that the power circuit is not overloaded, so as not to affect the normal operation of the switch and even cause unnecessary damage.
- ❖ To avoid the risk of electric shock, do not open the case while the switch is working, even if it is not charged, do not open it yourself.
- ❖ Before cleaning the switch, pull out the power plug of the switch. Do not wipe with a wet cloth. Do not use liquid to clean it.
- ❖ The equipment installed in the rack is generally from bottom to top to avoid overload installation.
- ❖ Avoid placing other heavy objects on the surface of the switch to avoid accidents.

## Order Information

| Model Number | 10/100/1000Base-T(X), RJ45 | 100/1000Base-X SFP | Gigabit Combo Port | Optical Port Connector Option | PoE Ports & Standard             | Input Voltage | Operating Temp. |
|--------------|----------------------------|--------------------|--------------------|-------------------------------|----------------------------------|---------------|-----------------|
| FR-9M3424P   | 24                         | —                  | 4                  | LC                            | Port 1-24<br>IEEE802.3 af/at     | DC9-56V       | -40 to +75°C    |
| FR-9M348FP   | 16                         | 4                  | 4                  | LC                            | Port 9-24<br>IEEE802.3 af/at     | DC9-56V       | -40 to +75°C    |
| FR-9M34F8P   | 8                          | 16                 | 4                  | LC                            | Port 17-24<br>IEEE802.3 af/at    | DC9-56V       | -40 to +75°C    |
| FR-9M3424BT  | 24                         | —                  | 4                  | LC                            | Port 1-24<br>IEEE802.3 af/at/bt  | DC9-56V       | -40 to +75°C    |
| FR-9M348FBT  | 16                         | 4                  | 4                  | LC                            | Port 9-24<br>IEEE802.3 af/at/bt  | DC9-56V       | -40 to +75°C    |
| FR-9M34F8BT  | 8                          | 16                 | 4                  | LC                            | Port 17-24<br>IEEE802.3 af/at/bt | DC9-56V       | -40 to +75°C    |

The information in this document is subject to change without notice. Fiberroad has made all effects to ensure the accuracy of the information, but all information in this document does not constitute any kind of warranty. Visit our website for the most up-to-date product information

## For more information

For more information about Fiberroad Smart Industrial Ethernet series products, Visit <https://www.fiberroad.com> or contact your local account representative.