




Industrial PoE Media Converter

Product Data Sheet



Industrial PoE Media Converter

The FR-IPM2003 Series is a flexible, industrial PoE Media Converter that extends network connections via its 100/1000BASE-X SFP port. It simplifies deployment with IEEE 802.3at/bt PoE input and offers versatile power options, providing either PoE+ or DC 5-24V output to support a wide array of devices.

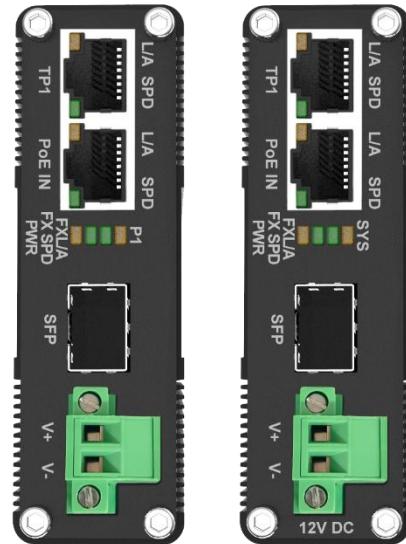

Hardware Specifications

Product	FR-IPM2003M-1GF1PG-DP-30	FR-IPM2003M-1GF1GE-P-30
Copper Ports	2x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (TP1 and PoE IN), Auto-Negotiation	
Fiber Ports	1x100/1000BASE-X SFP Slots	
Enclosure	IP40 aluminum case	
Installation	DIN-Rail and Wall-mount	
Dimension	95mm x 70mm x 30mm (L x W x H)	
Weight	250g(Bare weight)	
Network Cable	10/100/1000BASE-T: 2-pair UTP Cat. 3, 4, 5e, 6 (maximum 100 meters) EIA/ TIA-568 100-ohm STP (maximum 100 meters) 100BASE-FX/1000BASE-SX/LX Multi-mode: 50/125um or 62.5/125um optical fiber Single-mode: 9/125um optical fiber	

Power Supply and PoE


Power Input	PD Port/DC Terminal	PoE Input(TP2), IEEE802.3 at/bt or DC36-48V (V+/V-)	
	Input Voltage	PoE Input: DC48-57V or DC Input: DC36-48V(Option)	
DC Power Output	Connector	/	1 removable 2-contact terminal blocks
	Output Voltage	/	5-24VDC (Shared 60W power)
Power Consumption		5 Watts Max (without PoE load)	
PoE Ports		TP1 IEEE802.3 af/at	/
PoE Power Supply Type		End-span	/
Power Supply Pin		1/2(+), 3/6(-)	/
Max Power Per Port		30W	/
Total Power Budget		30W Maximum (Depending on power input)	30W Maximum (Depending on power input)

Product Specifications

Environmental	
Operating Temperature	-30°C to +70°C (-22 to 158 °F)
Storage Temperature	-40°C to +85°C (-40 to 185 °F)
Operating Humidity	5%~90% (non-condensing)
Cooling	Passive Cooling
MTBF	>500,000 hours @MIL-HDBK-217F GF 25°C
LED Indicators	
PWR	ON: Power is being supplied ,OFF: Power is not being supplied
RJ45 Port Green LEDs(L/A)	ON: Port connection is active, Blinking: Data transmitted, OFF: Port connection is not active
RJ45 Port Amber LEDs(SPD)	ON: Port is operating at 1000 Mb/s, OFF: Port is operating at 10/100 Mb/s
P1 (Model Dependent)	ON: Connected PD load
SYS	ON: System running well
FX L/A	ON: Opti fiber cable is connected well, but no data transmission. Blinking: Receiving data
FX SPD	ON: FX 1000M running, OFF: FX 100M running
Regulatory & Warranty	
Standard Compliance	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet
ISO	Manufactured in ISO-9001 facility
Safety	IEC62368-1:2020+A11:2020
EMI	FCC Part 15B Class A, IEC 61000-3-2
EMS	IEC61000-4-2 ESD: Contact:±8kV, Air:±15kV IEC61000-4-5 Surge: Power: ±6kV; RJ45:±4kV/±6kV(PoE)
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Environmental	RoHS 2011/65/EU Annex II(EU)
Warranty	3 Years, Details See: https://fiberroad.com/warranty
Package Contents	
Device	1 x Industrial Media Converter
Installation Kit	1 x DIN-Rail Clip 2 x Wall-Mount Kits
Documentation	1 x Quick installation guide 1 x Warranty card 1 x Product notice

Dimensions

Unit: mm

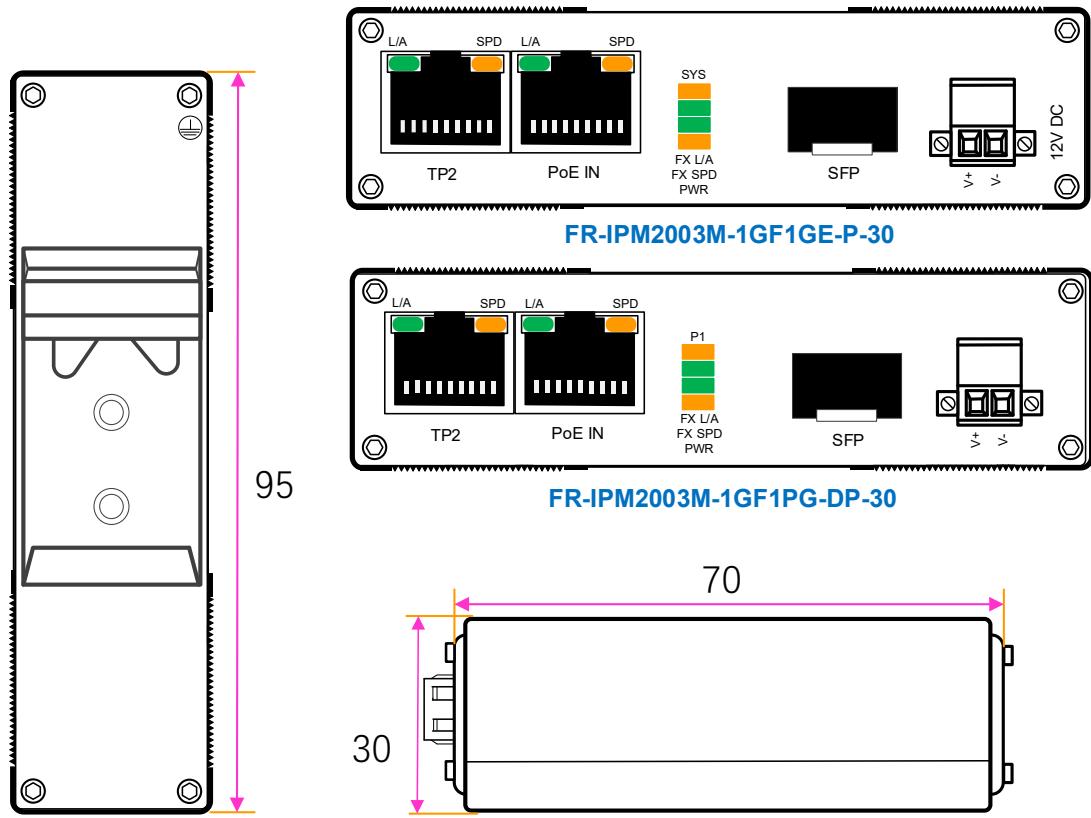

Precautions

To avoid damage to the equipment and personal injury caused by improper use, please observe the following precautions:

- ❖ Keep the power off during installation, wear an anti-static wrist, and ensure that the anti-static wrist is in good contact with the skin to avoid potential safety hazards.
- ❖ The switch can work normally under the correct power supply. Please confirm that the power supply voltage matches the voltage indicated by the switch.
- ❖ Before powering on the switch, please make sure that the power circuit is not overloaded, so as not to affect the normal operation of the switch and even cause unnecessary damage.
- ❖ To avoid the risk of electric shock, do not open the case while the switch is working, even if it is not charged, do not open it yourself.
- ❖ Before cleaning the switch, pull out the power plug of the switch. Do not wipe with a wet cloth. Do not use liquid to clean it.
- ❖ The equipment installed in the rack is generally from bottom to top to avoid overload installation.
- ❖ Avoid placing other heavy objects on the surface of the switch to avoid accidents.

Order Information

Model Number	10/100/1000Base-T RJ45	100/1000Base-X SFP	PoE Output	PoE Input	Power Output	Operating Temp.
FR-IPM2003M-1GF1PG-DP-30	2	1	TP1 802.3 af/at	802.3 at/bt	/	-30 to +70°C
FR-IPM2003M-1GF1GE-P-30	2	1	/	802.3 at/bt	2xDC5-24V	-30 to +70°C

The information in this document is subject to change without notice. Fiberroad Technology Co., Limited has made all efforts to ensure the accuracy of the information, but all information in this document does not constitute any kind of warranty. Contact us for the most up-to-date product information.

For more information

For more information about Fiberroad Smart Industrial Ethernet series products, Visit <https://www.fiberroad.com> or contact your local account representative.