



UNMANAGED INDUSTRIAL FIBER MEDIA CONVERTER

Product Data Sheet



7N Series Industrial Fiber Media Converter

The Fiberroad 7N Series Unmanaged Industrial Ethernet Switch stands out as a robust and budget-friendly solution specifically designed for the demanding environments of outdoor space CCTV cameras and diverse industrial networking requirements. Engineered to withstand harsh weather conditions, this unmanaged industrial Ethernet switch offers seamless connectivity, ensuring that surveillance systems operate flawlessly even in challenging settings. Its optional support for IEEE 802.3 af/at/bt Power Over Ethernet Standard further enhances its versatility by allowing power delivery along with data transmission through the same cable, simplifying installations and reducing clutter. With multiple ports available for quick integration into existing networks, this unmanaged industrial Ethernet switch provides reliable performance while keeping operational costs low—a perfect match for industries looking to enhance their network infrastructure without compromising on quality or efficiency.



Hardware Specifications

Product	FR-7N1101	FR-7N1101P	FR-7N1101BT
Copper Ports	1x10/100BASE-TX RJ45 Auto-MDI/MDI-X (Port 1)		
Fiber Ports	1x100BASE-X SFP Slot (Port 2)		
Enclosure	IP40 aluminum case		
Installation	DIN-Rail and Wall-mount		
Dimension	120 x 90 x 35 mm		
Weight	370g(Bare weight), 470g(With package)		
Surge Protection	±6kV DC, ±4kV RJ45	±6kV DC, ±6kV RJ45	
Switching			
Switch Architecture	Store-and-Forward		
Switch Fabric	1.8Gbps/non-blocking		
Forward Filter Rate	14,880pps(10Mbps) 148,800pps(100Mbps)		
Packet Buffer Size	1 Mbits		
MAX. Packet Length	1536 bytes		
MAC Address Table	2K entries, automatic source address learning and aging		

Product Specifications

Power Supply and PoE			
Product	FR-7N1101	FR-7N1101P	FR-7N1101BT
Power Input	2		
Power Connector	1 removable 6-contact terminal blocks Pin 1/2 for Power 1, Pin 3/4 for Power 2, Pin 5/6 for fault alarm(As required)		
Operating Voltage	DC9-56V	DC48-56V	DC52-56V
Power Consumption	3 Watts Max (without PoE load)		
Protection	Reverse Polarity, Overload Current		
PoE Ports	\	Port 1 IEEE802.3 af/at	Port 1 IEEE802.3 af/at/bt
PoE Power Supply Type	\	End-span	End-span
Power Supply Pin	\	1/2(+), 3/6(-)	1/2(+), 3/6(-) or 4/5(+), 7/8(-)
Max Power Per Port	\	30W	90W
PoE Power Budget	\	35W	95W
Environmental			
Operating Temperature	-40°C to +75°C (-40 to 167 °F)		
Storage Temperature	-40°C to +85°C (-40 to 185 °F)		
Operating Humidity	5%~95% (non-condensing)		
Heat Dissipation	7 BTU/h (Non-PoE), 218 BTU/h (with 30W PoE load), 314 BTU/h (with 90W PoE load)		
Cooling	Passive Cooling		
MTBF	>500,000 hours @MIL-HDBK-217F GF 25°C		
LED Indicators			
P1 & P2	ON: Power is being supplied ,OFF: Power is not being supplied		
Fiber Port	ON: Port connection is active, Blinking: Data transmitted, OFF: Port connection is not active		
RJ45 Port Amber LEDs	ON: Port connection is active, Blinking: Data transmitted, OFF: Port connection is not active		
RJ45 Port Green LEDs	ON: Port is operating at 100 Mb/s, OFF: Port is operating at 10 Mb/s		
Regulatory & Warranty			
Standard Compliance	IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet, IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet		
ISO	Manufactured in ISO-9001facility		
Safety	IEC62368-1:2020+A11:2020		
EMI	FCC Part 15B Class A, IEC 61000-3-2		
EMS	IEC61000-4-2 ESD: Contact:±8kV, Air:±15kV IEC61000-4-5 Surge: Power: ±6kV; RJ45:±4kV/±6kV(PoE)		
Shock	IEC 60068-2-27		
Free Fall	IEC 60068-2-32		
Vibration	IEC 60068-2-6		
Environmental	RoHS 2011/65/EU Annex II(EU)		
Warranty	5 Years, Details See: https://fiberroad.com/warranty		
Package Contents			
Device	1 x Industrial Fiber Media Converter		
Installation Kit	1 x DIN-Rail Clip		
Documentation	1 x Quick installation guide, 1 x Warranty card		

Product Specifications

Accessories(Sold Separately)

Power Supply

FR-I-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

SFP Optical Transceiver


FRSX-1L311C-I	1.25Gb/s 1310nm 10km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)
FRSX-1L341C-I	1.25Gb/s 1310nm 40km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)
FRSX-1L5X1C-I	1.25Gb/s 1550nm 80/100km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)
FRSX-1L3523/5323C-I	1.25Gb/s 1310nm/1550nm 20km BiDi SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)

Armored Fiber Patch Cable / LAN Cable

FRPC-A-LC	Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Ourdoor Application , 1-50m
FRLC-A-CAT6	Armored Cat6 Snagless shielded(SFTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m - 3m

Dimensions

Unit: mm

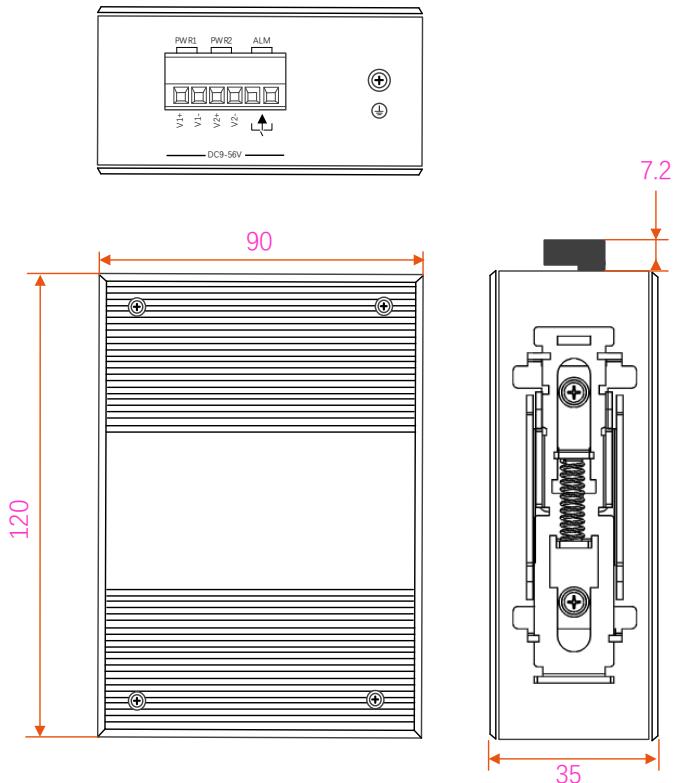

Precautions

To avoid damage to the equipment and personal injury caused by improper use, please observe the following precautions:

- ◆ Keep the power off during installation, wear an anti-static wrist, and ensure that the anti-static wrist is in good contact with the skin to avoid potential safety hazards.
- ◆ The switch can work normally under the correct power supply. Please confirm that the power supply voltage matches the voltage indicated by the switch.
- ◆ Before powering on the switch, please make sure that the power circuit is not overloaded, so as not to affect the normal operation of the switch and even cause unnecessary damage.
- ◆ To avoid the risk of electric shock, do not open the case while the switch is working, even if it is not charged, do not open it yourself.
- ◆ Before cleaning the switch, pull out the power plug of the switch. Do not wipe with a wet cloth. Do not use liquid to clean it.
- ◆ The equipment installed in the rack is generally from bottom to top to avoid overload installation.
- ◆ Avoid placing other heavy objects on the surface of the switch to avoid accidents.

Order Information

Model Number	10/100Base-TX RJ45	100Base-X Port	PoE Standard	Input Voltage	Operating Temp.
FR-7N1101	1	1	\	2xDC9-56V	-40 to +75°C
FR-7N1101A	1	1	\	1xAC220V	-40 to +75°C
FR-7N1101P	1	1	Port 1 802.3 af/at	2xDC9-56V	-40 to +75°C
FR-7N1101BT	1	1	Port 1 802.3 af/at/bt	2xDC9-56V	-40 to +75°C

Shipping

Model No.	FR-7N1101	FR-7N1101P	FR-7N1101BT
Classification Codes	HS Code: 851762		
	HTS: 8517.62.00		
NDAA Compliant	Yes		
Individual Gross Weight	470g	480g	
Individual Package Dimension	175x153x43mm		
Package Quantity	50 Units		
Package Gross Weight	24kg	24.5kg	
Package Dimension	540x315x430mm		

The information in this document is subject to change without notice. Fiberroad Technology Co., Limited has made all efforts to ensure the accuracy of the information, but all information in this document does not constitute any kind of warranty. Contact us for the most up-to-date product information.

For more information

For more information about Fiberroad Industrial Ethernet series product, Visit <https://www.fiberroad.com> or contact your local account representative.